



CITY OF STOCKTON

PUBLIC WORKS DEPARTMENT

22 East Weber Avenue, Room 301 • Stockton, CA 95202-2317 • 209 / 937-8411 • Fax 209 / 937-8277
www.stocktonca.gov

LETTER OF CLARIFICATION NO. 2

SAN JOAQUIN TRAIL PROJECT PROJECT NO. PW1442 / ATPL-5008(139)

TO ALL PROSPECTIVE BIDDERS

DATE: September 9, 2016

Letter of Clarification No. 2 for the above mentioned project consists of the following:

1. This acknowledgement form (see important notice at the end of this document).

BID FORMS:

2. **REPLACE** with the attached revised Bid Forms. The following items have been revised.
 - a. Bidding Schedule, Item No. 16 Bike Path Widening: **CHANGE** Quantity to 4,190 Linear Feet.
 - b. Bidding Schedule, Item No. 18 Reconstruct Bike Path: **CHANGE** Item Description with Remove and Replace Bike Path.
 - c. Bidding Schedule, Item No. 19 Reconstruct Access Path: **CHANGE** Item Description with Remove and Replace Access Path.

SPECIAL PROVISIONS:

3. Page SP25, Section 7; Measurement and Payment, 7-1.03 Payments: Item No. 16: Bike Path Widening: **CHANGE** Item Description to read:

By the lineal foot. Includes furnishing all labor, materials, tools, equipment, and incidentals including supplying and placing aggregate base, header board, tack coating, prime coating, asphalt concrete, **supplying and placing native soil as necessary, includes removal and disposal of existing plants to accommodate trail widening** and compacting as required and constructing to

the elevations, thickness and locations as indicated on the plans and described in these Special Provisions.

4. Page SP25, Section 7; Measurement and Payment, 7-1.03 Payments: Item No. 17: Bike Path Overlay: **CHANGE** Item Description to read:

By the square foot. Includes furnishing all labor, materials, tools, equipment, and incidentals including supplying and placing, tack coating, prime coating, asphalt emulsion, paving grid, asphalt concrete, **supplying and placing native soil as shown in the plans**, and compacting as required and constructing to the elevations, thickness and locations as indicated on the plans and described in these Special Provisions.

5. Page SP25, Section 7; Measurement and Payment, 7-1.03 Payments: Item No. 18: Reconstruct Bike Path: **CHANGE** Item Title with Remove and Replace Bike Path. **CHANGE** Item Description to read:

By the square foot. **Includes remove and dispose of the existing bike path and replacement of the bike path**, includes furnishing all labor, materials, tools, equipment, and incidentals including supplying and placing aggregate base, header board, tack coating, prime coating, asphalt concrete, **supplying and placing native soil as shown in the plans**, and compacting as required and constructing to the elevations, thickness and locations as indicated on the plans and described in these Special Provisions.

6. Page SP25, Section 7; Measurement and Payment, 7-1.03 Payments: Item No. 19: Reconstruct Access Path: **CHANGE** Item Title with Remove and Replace Access Path. **CHANGE** Item Description to read:

By the square foot. **Includes remove and dispose of the existing access path and replacement of the access path**, includes furnishing all labor, materials, tools, equipment, and incidentals including supplying and placing aggregate base, header board, tack coating, prime coating, asphalt concrete, **supplying and placing native soil as shown in the plans**, and compacting as required and constructing to the elevations, thickness and locations as indicated on the plans and described in these Special Provisions.

7. Page SP25, Section 7; Measurement and Payment, 7-1.03 Payments: Item No. 34: Install Drinking Fountain: **CHANGE** Item Description to read:

By each. Includes **remove and dispose of existing drinking fountains**, includes furnishing all labor, materials, tools, equipment, **supplying and delivery of fountains to the project site** and incidentals for the installation of drinking fountains at existing concrete pads, including plumbing, and attachment to concrete, complete in place, as shown on the plans and as described in these Special Provisions.

8. Page SP30, Section 9; Description of Work, 9-1.02 QUANTITIES: Bid Item List, Item No. 16: Bike Path Widening: **CHANGE** Quantity to 4,190 Linear Feet.

9. Page SP30, Section 9; Description of Work, 9-1.02 QUANTITIES: Bid Item List, Item No. 18: Reconstruct Bike Path: **CHANGE** Title to Remove and Replace Bike Path.

10. Page SP30, Section 9; Description of Work, 9-1.02 QUANTITIES: Bid Item List, Item No. 19: Reconstruct Access Path: **CHANGE** Title to Remove and Replace Access Path.

11. Page SP41, Section 10; Construction Details, 10-1.08 Water Pollution Control: **CHANGE** the third paragraph to read:

Full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved in constructing the temporary check dam, complete in place including removal of materials, **including removal of sod with sod cutter and retaining for later replacement, removal of soil, and retaining for later replacement if necessary**, cleanup and disposal of retained sediment and debris, and backfilling and repairing holes, depressions and other ground disturbance as shown on the plans, as specified in the Caltrans Specifications and these special provisions, and as directed by the Engineer shall be included in the contract price paid per lineal foot for each "Temporary Check Dam" and no additional compensation shall be allowed therefor.

12. Page SP51, Section 10; Construction Details, 10-1.15 Clearing and Grubbing: **CHANGE** the second paragraph to read:

Full compensation for clearing and grubbing shall be considered included in the contract lump sum price paid for "Clearing and Grubbing" and no additional compensation will be allowed. All the work involved in the clearing and grubbing, shall include the removal and disposal of all existing materials as shown on the plans, **including removal of existing header board shown in the plans**, as specified in the Standard Specifications, these Special Provisions, and as directed by the Engineer. Where it is required the contractor shall test the materials, according to Federal and State guidelines and regulations, before disposal.

13. Page SP 55, Section 10 Construction Details, 10-1.18 Bike Path Repair and or Reconstruction under Header Board: **CHANGE** the fourth, fifth, sixth, and seventh paragraphs to read:

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals including supplying and placing aggregate base, header board, tack coating, prime coating, asphalt emulsion, asphalt concrete, **supplying and placing native soil as necessary** and compacting as required and doing all work involved in bike path widening, complete in place, will be considered as included in the contract lineal foot price paid for "Bike Path Widening" and no additional compensation shall be allowed therefore.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals including supplying and placing aggregate base, header board, tack coating, prime coating, asphalt emulsion, asphalt concrete, **supplying and placing native soil as shown in the plans** and compacting as required and doing all work involved **in the removal and disposal of the existing bike path and replacement of the bike path**, complete in place, will be considered as included in the contract square foot price paid for "**Remove and Replace Bike Path**" and no additional compensation shall be allowed therefore.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals including supplying and placing aggregate base, header board, tack coating, prime coating, asphalt emulsion, asphalt concrete, **supplying and placing native soil as shown in the plans** and compacting as required and doing all work involved **in the removal and disposal of the existing access path and replacement of the access path**, complete in place, will be considered as included in the contract square foot price paid for "**Remove and Replace Access Path**" and no additional compensation shall be allowed therefore.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals including supplying and placing header board, tack coating, prime coating, asphalt emulsion, paving grid, asphalt concrete, **supplying and placing native soil as shown in the plans** and compacting as required and doing all work involved to overlay bike path, complete in place, will be considered as included in the contract square foot price paid for "Bike Path Overlay" and not additional compensations shall be allowed therefore.

14. Page SP 55, Section 10 Construction Details, 10-1.18 Bike Path Repair and or Reconstruction under Header Board: **ADD** the following paragraph:

Full compensation for supplying, placing and compacting native soil shall be considered included in the various items for work and no additional compensation will be allowed therefore. Soil Backing-Native Soil shall be placed along the back edge of header boards and or along the edge of newly placed asphalt concrete as shown on the plans or as directed by the Owner's Representative the native soil shall be placed and compacted to minimize the vertical difference between finish grade and existing ground.

15. Page SP 57, Section 10 Construction Details, 10-1.21 Hinged Bollards: **CHANGE** the second paragraph to read:

The bollard post shall be constructed of 6" x 3" x 3/8" steel tubing, the lock and hinge pin shall be construction of stainless steel. **Reinforcement shall be #4 rebar grade 60. Anchor bolts shall be 3/4-inch Dia. X 12-inch Type L, ASTM F1554 Grade 55.**

16. Page SP 87, Section 10 Construction Details, 10-2.04 Site Furnishings under Payment: **CHANGE** the eighth paragraph to read:

Install Drinking Fountain: Full compensation **for remove and dispose of existing drinking fountains**, full compensation for furnishing all labor, materials, delivery to the project site, tools, equipment, and incidentals for installation of drinking fountains, **connecting to the existing point of connection at or near the existing drinking fountain (footing) that will be replaced**, complete in place, as shown on the plans, shall be included in the contract unit price paid for "Installing Drinking Fountain" and no additional work compensation will be allowed therefore.

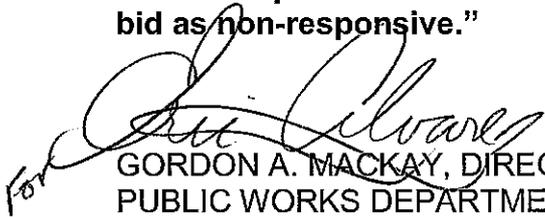
PLANS

- 17. Sheet No. 28: Civil Detail 1: **REMOVE** reference to Install Decomposed Granite to Match Grade (Typ) and **REPLACE** with Install Native Soil to Match Grade (Typ).

QUESTIONS & ANSWERS:

- 18. Please review all questions and answers for this project.

“Bids not presented on the revised bid forms shall be cause for considering the bid as non-responsive.”

For 
GORDON A. MACKAY, DIRECTOR
PUBLIC WORKS DEPARTMENT

GAM:EA:WJ:JW:KC:an

NOTICE: THIS FORM MUST BE SIGNED AND RETURNED WITH YOUR BID. FAILURE TO SO INCLUDE OR ACKNOWLEDGE A CLARIFICATION MAY RESULT IN THE BID BEING REJECTED AS NOT RESPONSIVE.

CONTRACTOR: _____

BIDDER SIGNATURE: _____

DATE: _____